



# Electrolux

## Digital Cabinets 400lt Line Refrigerator 1 Glass Door - Stainless steel

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



Digital Cabinets

400lt Line Refrigerator 1 Glass Door - Stainless steel

730190 (R04PVG4)

1-glass door refrigerator  
400lt, 0+10°C, stainless steel,  
ventilated

### Short Form Specification

#### Item No.

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged glass door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost and evaporation of defrost water; digital control and temperature display; internal lighting. For ambient temperatures up to 32 °C. HCFC, CFC and HFC free insulation and R134a refrigerant gas.

Supplied with n. 4 grids mm600x400, PE coated.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- Model equipped with roll-bond plate that has a plate installed in the internal backside of the unit equipped with a special thermostat to avoid ice formation.
- Suitable for use in ambient temperatures of up to 32 °C.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

### Included Accessories

- 2 of Pair of grids for 400lt refrigerator, white PNC 880292

### Optional Accessories

- Pair of grids for 400lt refrigerator, white PNC 880292 ☐
- Pvc container with false bottom for 400lt PNC 881072 ☐
- Printer for HACCP basic version (digital control) PNC 881457 ☐


APPROVAL: \_\_\_\_\_




Electrolux

400lt Line Refrigerator 1 Glass Door - Stainless steel  
Digital Cabinets

Front

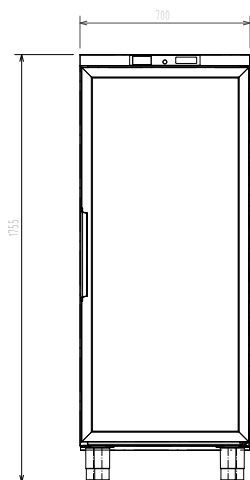


Top

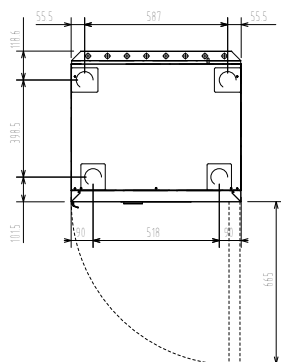

= Remote electrical connection  
 ED = Electrical connection  
 RI = Refrigerant Inlet  
 RO = Refrigerant Outlet

Side

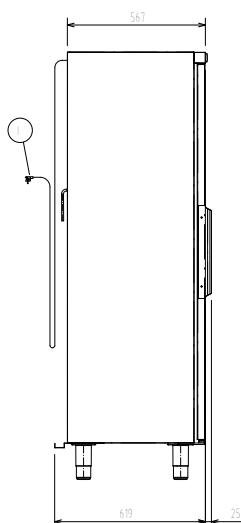

### Electric

**Supply voltage:**  
 730190 (R04PVG4) 230 V/1N ph/50 Hz  
**Electrical power:** 0.19 kW

### Key Information:

**Door hinges:** Right Side  
**External dimensions, Height:** 1755 mm  
**External dimensions, Width:** 700 mm  
**External dimensions, Depth with Doors Open:** 1310 mm  
**Gross capacity:** 400 lt  
**Noise level:** 55 dBA  
**Number and type of grids (included):** 4 - 600x400  
**Type of external material:** Stainless Steel  
**External door material:** Glass  
**Internal Light:** X

### Refrigeration Data

**Control type:** Digital  
**Compressor power:** 1/5 hp  
**Refrigerant type:** R134a  
**Refrigeration power:** 249 W  
**Refrigeration power at evaporation temperature:** -12 °C  
**Refrigerant weight:** 240 g  
**Min/Max internal humidity:** 70%/85%  
**Operating temperature min.:** 0 °C  
**Operating temperature max.:** 10 °C  
**Operating mode:** Ventilated  
**Cooling unit:** Built-In  
**Defrost type:** Automatic (air)