

# specifications


## BME600-A Series

Bottom Mount ActiveCore  
One Door Upright Chiller

### CABINET DIMENSIONS

	External	Internal
Height:	2005mm* / 2195mm**	1454mm
Width:	740mm	640mm
Depth:	795mm	602mm
Floor area:	0.63m <sup>2</sup> (includes door handle)	

\* Height 2005mm without sign (model BME600-A)  
\*\* Height 2195mm with sign (model BME600-AC)  
\*\*\* Depth 745mm excludes removable door handle, door lock bracket and rear stand-off.

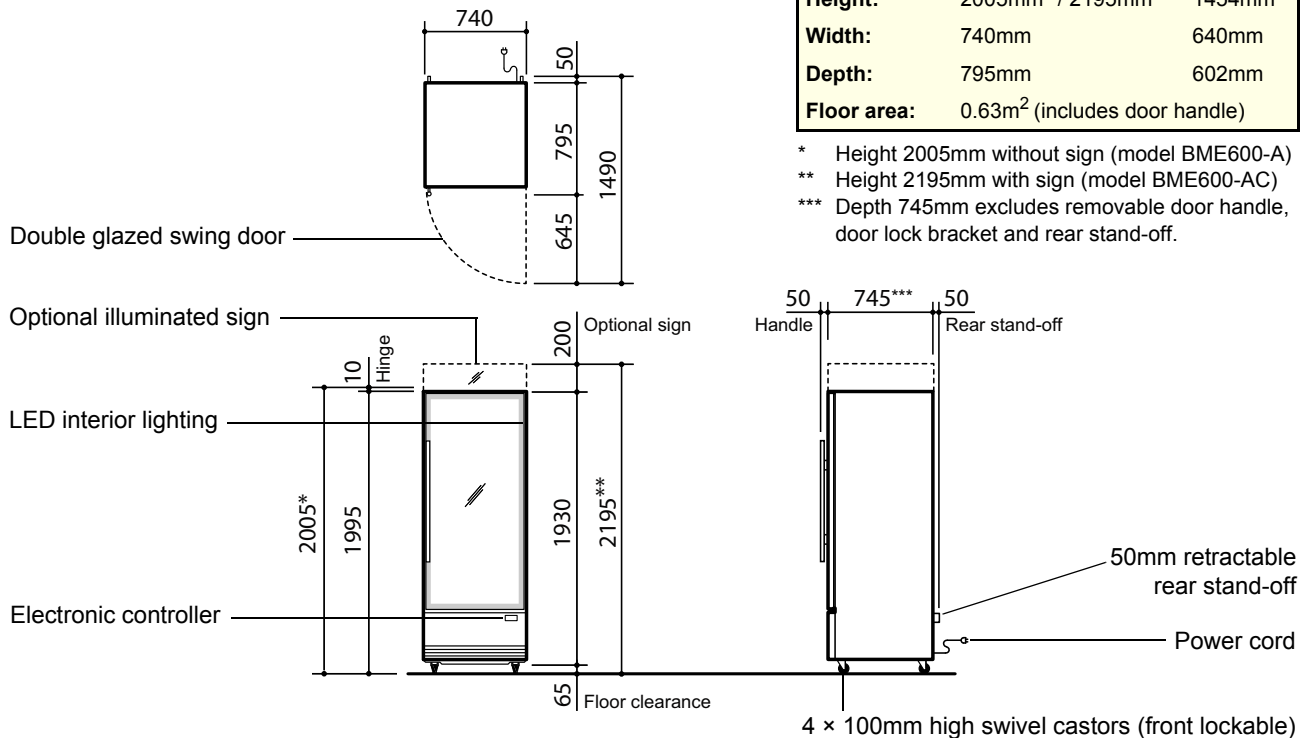

Copyright © 2016 SKOPE Industries Limited

### GENERAL SPECIFICATIONS

<b>Temperature range</b>	1°C to 4°C (adjustable up to 15°C)	
<b>Climate class</b>	5 (Tested at 43°C)	
<b>Door</b>	Lockable, self-closing, reversible, double glazed, single Low-E, argon filled, toughened safety glass swing door (hinged RH)	
<b>Internal Volume</b>	584 litres	
<b>Interior lighting</b>	1 × 20W T8 LED tube (Ø26mm × 1350mm) RH side light	
<b>Shelves</b>	4 adjustable height wire shelves: 625mm wide × 520mm deep plus one stainless steel bottom shelf: 625mm wide × 515mm deep	
<b>Power supply</b>	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug	
<b>Current draw</b>	3.5 Amps (includes unit 2.9 Amps)	
<b>Refrigeration system</b>	Removable ActiveCore bottom mount refrigeration unit (UBHCCI-0001)	
<b>Refrigerant</b>	R134a / 380g	
<b>Nominal capacity</b>	836 Watts	
<b>Controller</b>	Carel S4 electronic controller	
<b>Drainage</b>	No plumbing required	
<b>Weight</b>	185 kg	

### INDIVIDUAL SPECIFICATIONS

<b>Model</b>	BME600-A	BME600-AC
<b>Part number</b>	SM60GV	SM60BV
<b>Sign</b>	No sign	200mm high illuminated sign
<b>Sign lighting</b>	n.a.	1 × 11W T8 LED tube (Ø26mm × 600mm)

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0467 Rev. 2.0 Apr. 2017



**SKOPE INDUSTRIES LIMITED**

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.co.nz, Website: www.skope.com

