



Electrolux

Digital Undercounter 9 1/3 Drawer Refrigerated Counter -2+10°C, Stainless Steel

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

9 1/3 Drawer Refrigerated Counter -2+10°C, Stainless Steel
Digital Undercounter



Digital Undercounter

9 1/3 Drawer Refrigerated Counter -2+10°C,
Stainless Steel

790008 (HB9CAC) 9x1/3 drawer refrigerated
table, -2+10°C, stainless steel
- 220-230V/1N/50Hz - ASIA

790068 (HB9CAC6) 9x1/3 drawer refrigerated
table, -2+10°C, stainless steel
- 220V/1N/60Hz - ASIA

Short Form Specification

Item No. _____

The Electrolux range of refrigerated tables combines the convenience of worktop space with cold storage located below. This versatility allows remarkable savings in space while offering a functional and modular solution to any kitchen requirement. The range comprises of counters with a number of compartments, with built-in compressor unit, in various door or drawer configurations. The model detailed in this sheet has three compartments, nine one third drawers and operates over the temperature range of -2 °C to 10 °C.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.

Construction

- Full stainless steel construction. Internal structure and worktop in AISI 304 Stainless steel.
- Built-in compressor to suit operating conditions.
- Mounted on 150 mm adjustable feet.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- Drawers capable of keeping loads up to 53 kg.
- High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection for long-term insulation and energy saving.
- CFC, HCFC, HFC-free insulation.
- Removable magnetic gasket door with hygienic design.

Optional Accessories

- Lock kit for counters PNC
880227
- Kit integrated HACCP for digital refrigerators (IR33) PNC
880252

APPROVAL: _____



Electrolux

**Digital Undercounter
9 1/3 Drawer Refrigerated Counter
-2+10°C, Stainless Steel**


- 1x1/1GN PVC grid for counters PNC 880299
- Kit of 5 wheels (front with brake) for cabinets and counters PNC 880301
- Kit of 2x½ drawers for counters PNC 880305
- Kit of 3x½ drawers for counters PNC 880309
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457



**Digital Undercounter
9 1/3 Drawer Refrigerated Counter -2+10°C, Stainless Steel**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.09.22

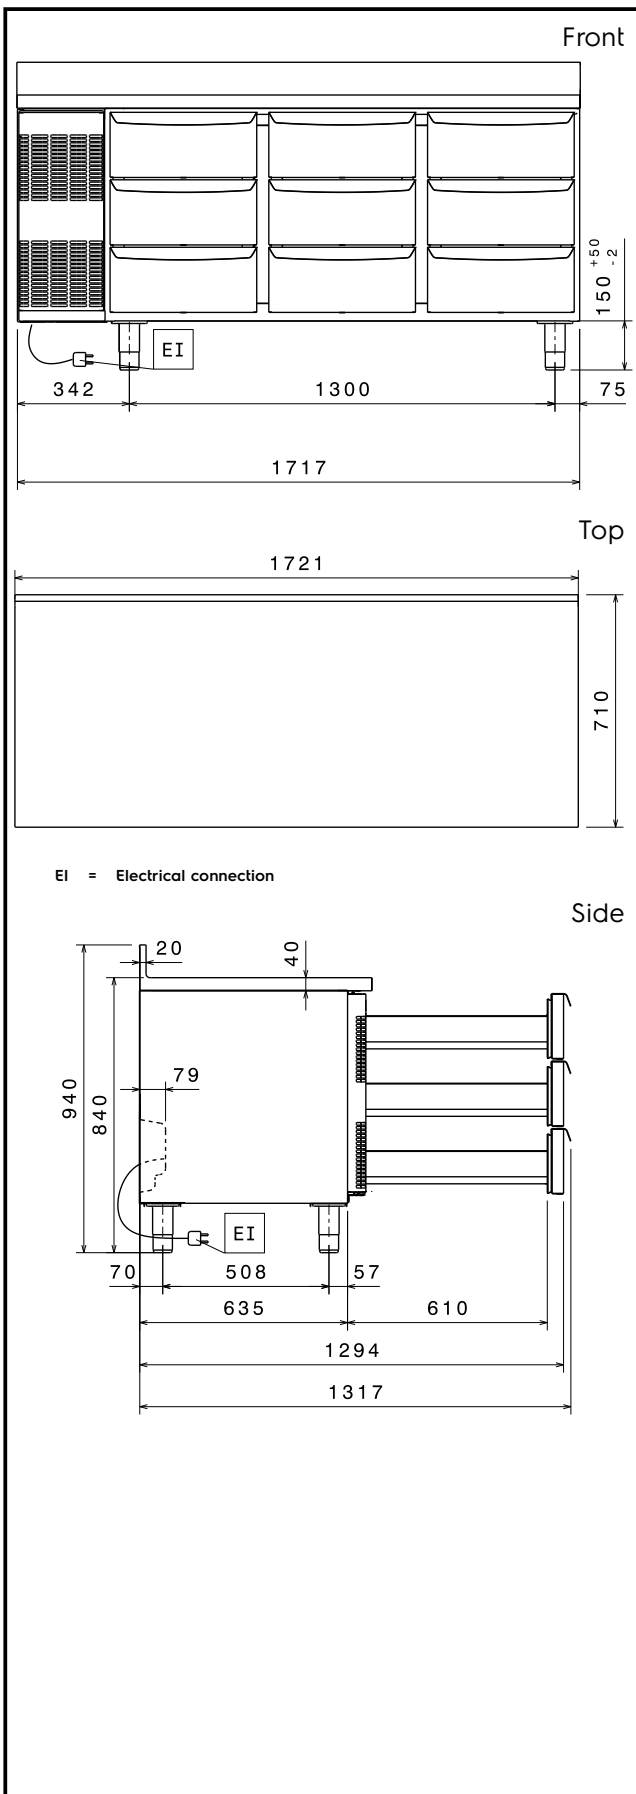

Electric

Supply voltage:

790008 (HB9CAC)	220-230 V/1N ph/50 Hz
790068 (HB9CAC6)	220 V/1N ph/60 Hz

Electrical power max.: 0.35 kW

Key Information:

Gross capacity:	420 lt
External dimensions, Height:	840 mm
External dimensions, Width:	1721 mm
External dimensions, Depth:	710 mm
External dimensions, Depth with Doors Open:	
790008 (HB9CAC)	1317 mm
790068 (HB9CAC6)	1266 mm
Depth with doors open:	
790008 (HB9CAC)	1317 mm
790068 (HB9CAC6)	1266 mm
Number and type of grids (included):	None - GN 1/1
N° of drawers:	9x1/3

Refrigeration Data

Compressor power:	1/3 hp
Refrigerant type:	R404a
Refrigeration power:	
790008 (HB9CAC)	877 W
790068 (HB9CAC6)	1139 W
Refrigerant weight:	
790008 (HB9CAC)	290 g
790068 (HB9CAC6)	240 g
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C