

Modular Cooking Range Line 700XP 11 It. Electric Multifunctional Cooker with compound bottom



TEM #	
NODEL #	
NAME #	
SIS #	
NIA #	

Main Features

- Multi purpose cooking appliance that can be used to shallow fry, cook liquids or even as a bain marie. Unit can be used for sautéing, poaching, steaming, simmering, stewing, braising, boiling and preparing white sauces.
- Well cooking surface made in compound steel (a 3mm layer of 316 AISI stainless steel on top of a 12mm layer of mild steel) for optimum grilling results.
- The stainless steel well to have rounded corners to facilitate cleaning.
- Bottom temperature control is precisely set by a thermostat on the control panel.
- Temperature can be set from 100 °C to 250 °C.
- Uniform temperature distribution over the whole base.
- Short heat-up time of the empty pan.
- Unit to be heated via incoloy armoured heating elements.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of Scraper for smooth plate fry tops PNC 164255
- 1 of Blades with rounded sides for PNC 921694 scraper for multifunctional cookers

Optional Accessories


Flanged feet kit	PNC 206136
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210
• 2 supports with side runners for 4 GN 1/1 containers for open base cupboards (multifunctional cookers, solid top and gas ranges with cupboard)	PNC 206244
Pair of side kicking strips	PNC 206249
• Pair of side kicking strips for concrete installation	PNC 206265
Lid for 11lt multifunctional cooker	PNC 921689

APPROVAL:

Electrolux

Electrolux

Modular Cooking Range Line 700XP 11 It. Electric Multifunctional Cooker with compound bottom

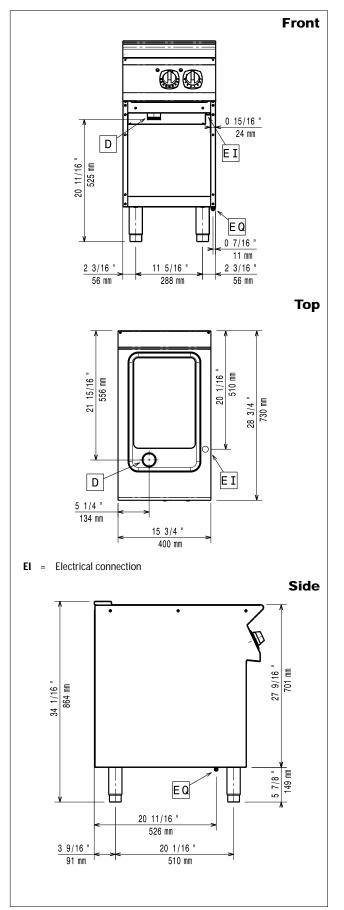

CE

<u>tå</u>)

Electric

Supply voltage: 371109(E7MFEDDD00)400 V/3N ph/50/60 HzTotal Watts:5 kWKey Information:100 °CWorking Temperature MIN:100 °CWorking Temperature MAX:250 °CNet weight:40 kgShipping weight:50 kgShipping height:1140 mmShipping width:500 mmShipping depth:820 mmShipping volume:0.47 m³		
Working Temperature MIN:100 °CWorking Temperature MAX:250 °CNet weight:40 kgShipping weight:50 kgShipping height:1140 mmShipping width:500 mmShipping depth:820 mm	371109(E7MFEDDD00)	•
Working Temperature MAX:250 °CNet weight:40 kgShipping weight:50 kgShipping height:1140 mmShipping width:500 mmShipping depth:820 mm	Key Information:	
Net weight:40 kgShipping weight:50 kgShipping height:1140 mmShipping width:500 mmShipping depth:820 mm	Working Temperature MIN:	100 °C
Shipping weight:50 kgShipping height:1140 mmShipping width:500 mmShipping depth:820 mm	Working Temperature MAX:	250 °C
Shipping height:1140 mmShipping width:500 mmShipping depth:820 mm	Net weight:	40 kg
Shipping width:500 mmShipping depth:820 mm	Shipping weight:	50 kg
Shipping depth: 820 mm	Shipping height:	1140 mm
	Shipping width:	500 mm
Shipping volume: 0.47 m ³	Shipping depth:	820 mm
	Shipping volume:	0.47 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Modular Cooking Range Line 700XP 11 It. Electric Multifunctional Cooker with compound bottom

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.